

Chapter Two (a): Adding Licences

Summary of Chapter:

- How to add a licence on your Pilot.

What you need:

- Knowledge of admin user account and valid password for your Pilot.
- A PoP code. You can purchase your PoP from the following address:
<http://www.equinet.com/ordering/default.asp>

Software Revision Required:

- Applicable to software revision 5.2.0 > Net/CachePilots


(Net/CachePilot will be referred to as 'Pilot'. All image examples are of a NetPilot.)

Adding Licences:


- Log on to the Pilot as shown in Chapter One (b).
- Select the 'Licences - Add or delete' link, as highlighted below.



Tip! To get back to this 'Main Menu' at anytime, select the Equinet logo in the top left corner.

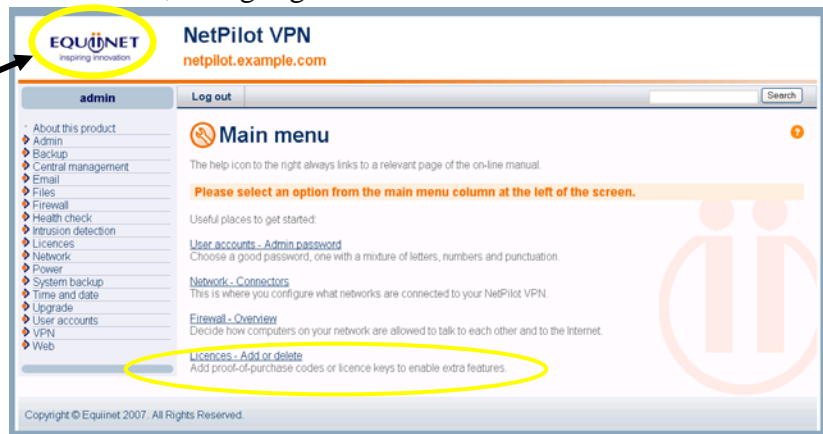

- You will be presented with a similar screen as shown below:

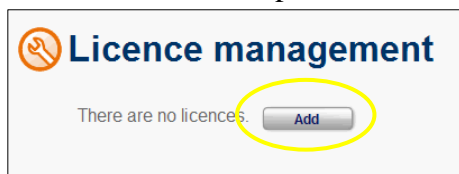

- Select the 'Add' button as highlighted.

- You will be presented with this screen below:


- 'Hardware serial number': enter your Pilot's serial number. (This is found on the bottom or back of your Pilot.)


- 'Proof of Purchase': enter your PoP code that you have been given. (Not case sensitive)


- 'Licence Key': Leave this blank


- 'Administrator email': enter the address, which you want all the confirmation emails to go to.


- Select 'OK'.


 In the next screen, your PoP details will be shown, please check the details you have entered and then select 'OK'.


 You will be taken to an Internet page. If this is the first time you have entered a licence on this Pilot, you will need to register the Pilot. Please fill in your details as accurate as possible.

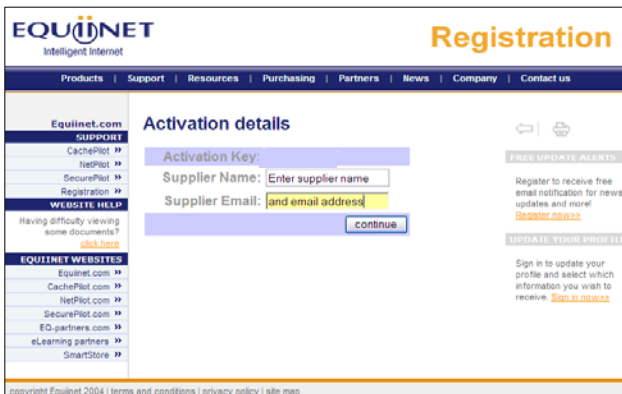


 If you have already registered the Pilot you will only be asked to enter in your supplier name and email address as shown left.

 Once you have entered in the relevant details that you are asked for, select the 'Continue' button.


 You will return to the Pilot, and be presented with the below screen:

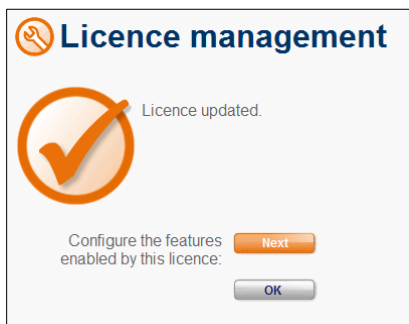



 Select the 'Next' button


 The next screen is shown below:

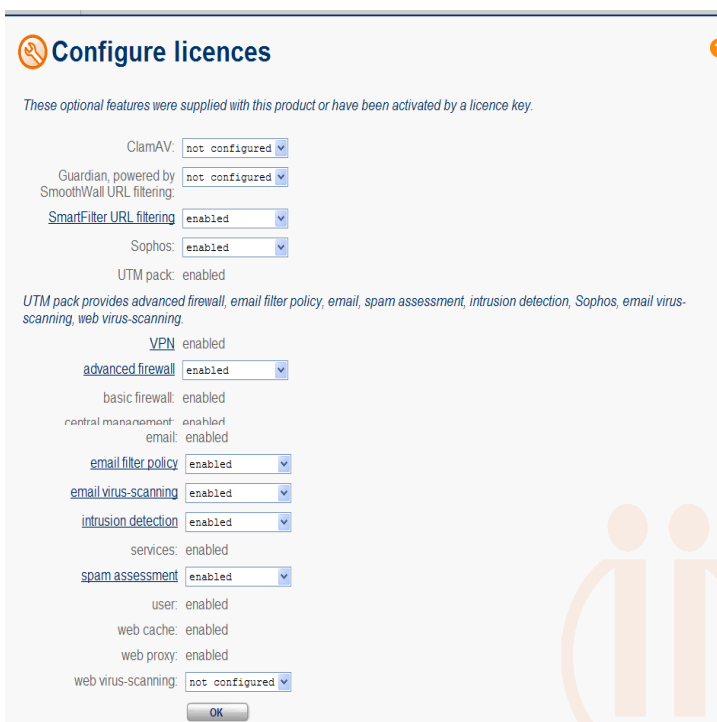 All the licensed features on the Pilot are presented in this screen.



 The features with drop-down lists are the licences you've added; the others are default settings on the Pilot.

 In this screen you can enable or disable the licences.

 Once you have chosen to 'enabled' or 'not configured' the licences select 'OK' and 'OK' again to confirm the settings you have changed.